


A303313

Type 3N5

Cable Construction		
Insulated Conductor (3)	Conductor: 20 AWG Tinned Cadmium Copper	O.D.
Insulation	EPR	.095"
Assembly	Cable 3 Conductors	.205"
Jacket	Neoprene	.343"

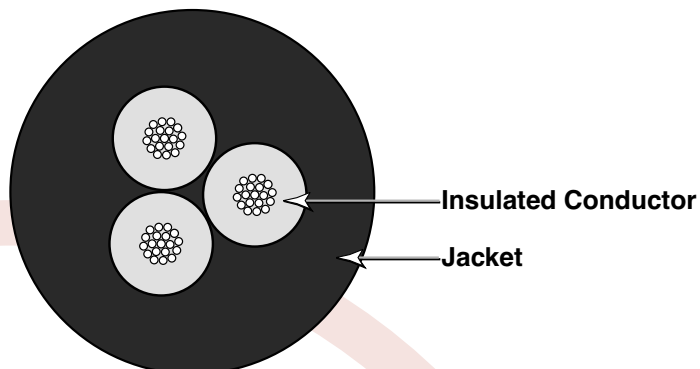

Cable Characteristics (Nominal Values @ 20°C)

Physical		
	metric	english
Weight in Air	100 kg/km	67 lb/kft
Weight in Sea Water	39 kg/km	26 lb/kft

Mechanical		
	metric	english
Recommended Minimum Bend Radius	8 cm	3"

Electrical		
	metric	english
Voltage Rating		
Conductor to Conductor	600 volts	600 volts
dc Resistance		
Conductor	46.9 Ω/km	14.3 Ω/kft
Insulation Resistance		
Conductor to mate	300 MΩ-km	1,000 MΩ-kft

Capacitance		
	metric	english
Conductor to mate	≤ 98.4 pF/m	≤ 30 pF/ft

